
Silicon Controlled Rectifiers

Reverse Blocking Triode Thyristors


. . . PNPN devices designed for high volume consumer applications such as temperature, light, and speed control; process and remote control, and warning systems where reliability of operation is important.

- · Passivated Surface for Reliability and Uniformity
- · Power Rated at Economical Prices
- Practical Level Triggering and Holding Characteristics
- Flat, Rugged, Thermopad Construction for Low Thermal Resistance, High Heat Dissipation and Durability
- Recommended Electrical Replacement for C106



2N6237 thru 2N6241

SCRs 4 AMPERES RMS 50 thru 600 VOLTS



MAXIMUM RATINGS ($T_J = 25^{\circ}C$ unless otherwise noted.)

Rating		Symbol	Value	Unit	
*Repetitive Peak Forward and Reverse Blocking (1/2 Sine Wave) (RGK = 1000 ohms, TC = -40 to +110°C)	Voltage ⁽¹⁾ 2N6237 2N6238 2N6239 2N6240 2N6241	VDRM or VRRM	50 100 200 400 600	Volts	
*Non-repetitive Peak Reverse Blocking Voltage (1/2 Sine Wave, R _{GK} = 1000 ohms, T _C = -40 to +110°C)	2N6237 2N6238 2N6239 2N6240 2N6241	VRSM	100 150 250 450 650	Volts	
*Average On-State Current (T _C = -40 to +90°C) (T _C = +100°C)		lT(AV)	2.6 1.6	Amps	
*Surge On-State Current (1/2 Sine Wave, 60 Hz, T _C = +90°C) (1/2 Sine Wave, 1.5 ms, T _C = +90°C)		ITSM	25 35	Amps	
Circuit Fusing (t = 8.3 ms)		l ² t	2.6	A ² s	
*Peak Gate Power (Pulse Width = 10 μs, T _C = 90°C)		P _{GM}	0.5	Watts	

^{*}Indicates JEDEC Registered Data.

(continued)

^{1.} V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.



2N6237 thru 2N6241

MAXIMUM RATINGS — continued ($T_C = 25^{\circ}C$ unless otherwise noted.)

Rating	Symbol	Value	Unit
*Average Gate Power (t = 8.3 ms, T _C = 90°C)	P _{G(AV)}	0.1	Watt
Peak Forward Gate Current	I _{GM}	0.2	Amp
Peak Reverse Gate Voltage	^V RGM	6	Volts
*Operating Junction Temperature Range	TJ	-40 to +110	°C
*Storage Temperature Range	T _{stg}	-40 to +150	°C
Mounting Torque(1)	_	6	in. lb.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Min	Max	Unit
*Thermal Resistance, Junction to Case	$R_{ heta JC}$	_	3	°C/W
Thermal Resistance Junction to Ambient	$R_{ heta JA}$	_	75	°C/W

^{*}Indicates JEDEC Registered Data.

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ and $R_{GK} = 1000$ ohms unless otherwise noted.)

Characteristic	Symbol	Min	Тур	Max	Unit
*Peak Forward or Reverse Blocking Current (V_{AK} = Rated V_{DRM} or V_{RRM}) T_{C} = 25°C T_{C} = 110°C	IDRM, IRRM	_ _		10 200	μΑ μΑ
*Peak Forward "On" Voltage (I _{TM} = 8.2 A Peak, Pulse Width = 1 to 2 ms, 2% Duty Cycle)	V _{TM}	_	_	2.2	Volts
Gate Trigger Current (Continuous dc)(2) ($V_{AK} = 12 \text{ Vdc}$, $R_L = 24 \text{ Ohms}$) * ($V_{AK} = 12 \text{ Vdc}$, $R_L = 24 \text{ Ohms}$, $T_C = -40^{\circ}\text{C}$)	^I GT	_ _		200 500	μΑ
Gate Trigger Voltage (Continuous dc) (Source Voltage = 12 V, R_S = 50 Ohms) *(V_{AK} = 12 Vdc, R_L = 24 Ohms, T_C = -40°C)	VGT	_	_	1	Volts
Gate Non-Trigger Voltage $(V_{AK} = Rated V_{DRM}, R_L = 100 Ohms, T_C = 110^{\circ}C)$	V _{GD}	0.2	_	_	Volts
Holding Current $ (V_{AK} = 12 \text{ Vdc}, I_{GT} = 2 \text{ mA}) \qquad T_{C} = 25^{\circ}\text{C} $ * (Initiating On-State Current = 200 mA) $T_{C} = -40^{\circ}\text{C}$	Ιн	_	_	5 10	mA
*Total Turn-On Time (Source Voltage = 12 V, R _S = 6 k Ohms) (I_{TM} = 8.2 A, I_{GT} = 2 mA, Rated V_{DRM}) (Rise Time = 20 ns, Pulse Width = 10 μ s)	^t gt	_	2	_	μs
Forward Voltage Application Rate (V _D = Rated V _{DRM} , T _C = 110°C)	dv/dt	_	10	_	V/μs

^{*}Indicates JEDEC Registered Data.

^{1.} Torque rating applies with use of compression washer (B52200F006 or equivalent). Mounting torque in excess of 6 in. lb. does not appreciably lower case-to-sink thermal resistance. Anode lead and heatsink contact pad are common. (See AN-209 B)


For soldering purposes (either terminal connection or device mounting), soldering temperatures shall not exceed +200°C. For optimum results an activated flux (oxide removing) is recommended.


^{2.} Measurement does not include RGK current.

2N6237 thru 2N6241




FIGURE 2 - MAXIMUM AMBIENT TEMPERATURE

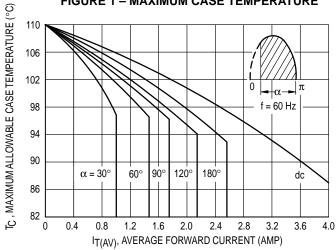

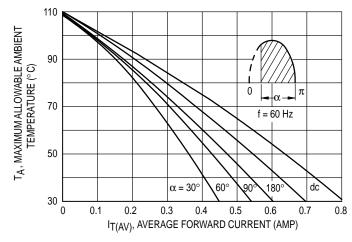

PACKAGE DIMENSIONS

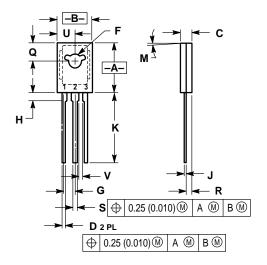

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

	INCHES MILLIMETER			IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.425	0.435	10.80	11.04
В	0.295	0.305	7.50	7.74
С	0.095	0.105	2.42	2.66
D	0.020	0.026	0.51	0.66
F	0.115	0.130	2.93	3.30
G	0.094	0.094 BSC		BSC
Н	0.050	0.095	1.27	2.41
۲	0.015	0.025	0.39	0.63
K	0.575	0.655	14.61	16.63
М	5° TYP		5° TYP	
Ø	0.148	0.158	3.76	4.01
R	0.045	0.055	1.15	1.39
S	0.025	0.035	0.64	0.88
U	0.145	0.155	3.69	3.93
٧	0.040		1.02	

STYLE 2: PIN 1. CATHODE

2. ANODE 3 GATE

CASE 77-08 (TO-225AA)

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.

ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

